


*American
Standard*

TOUCHLESS
SOLUTIONS



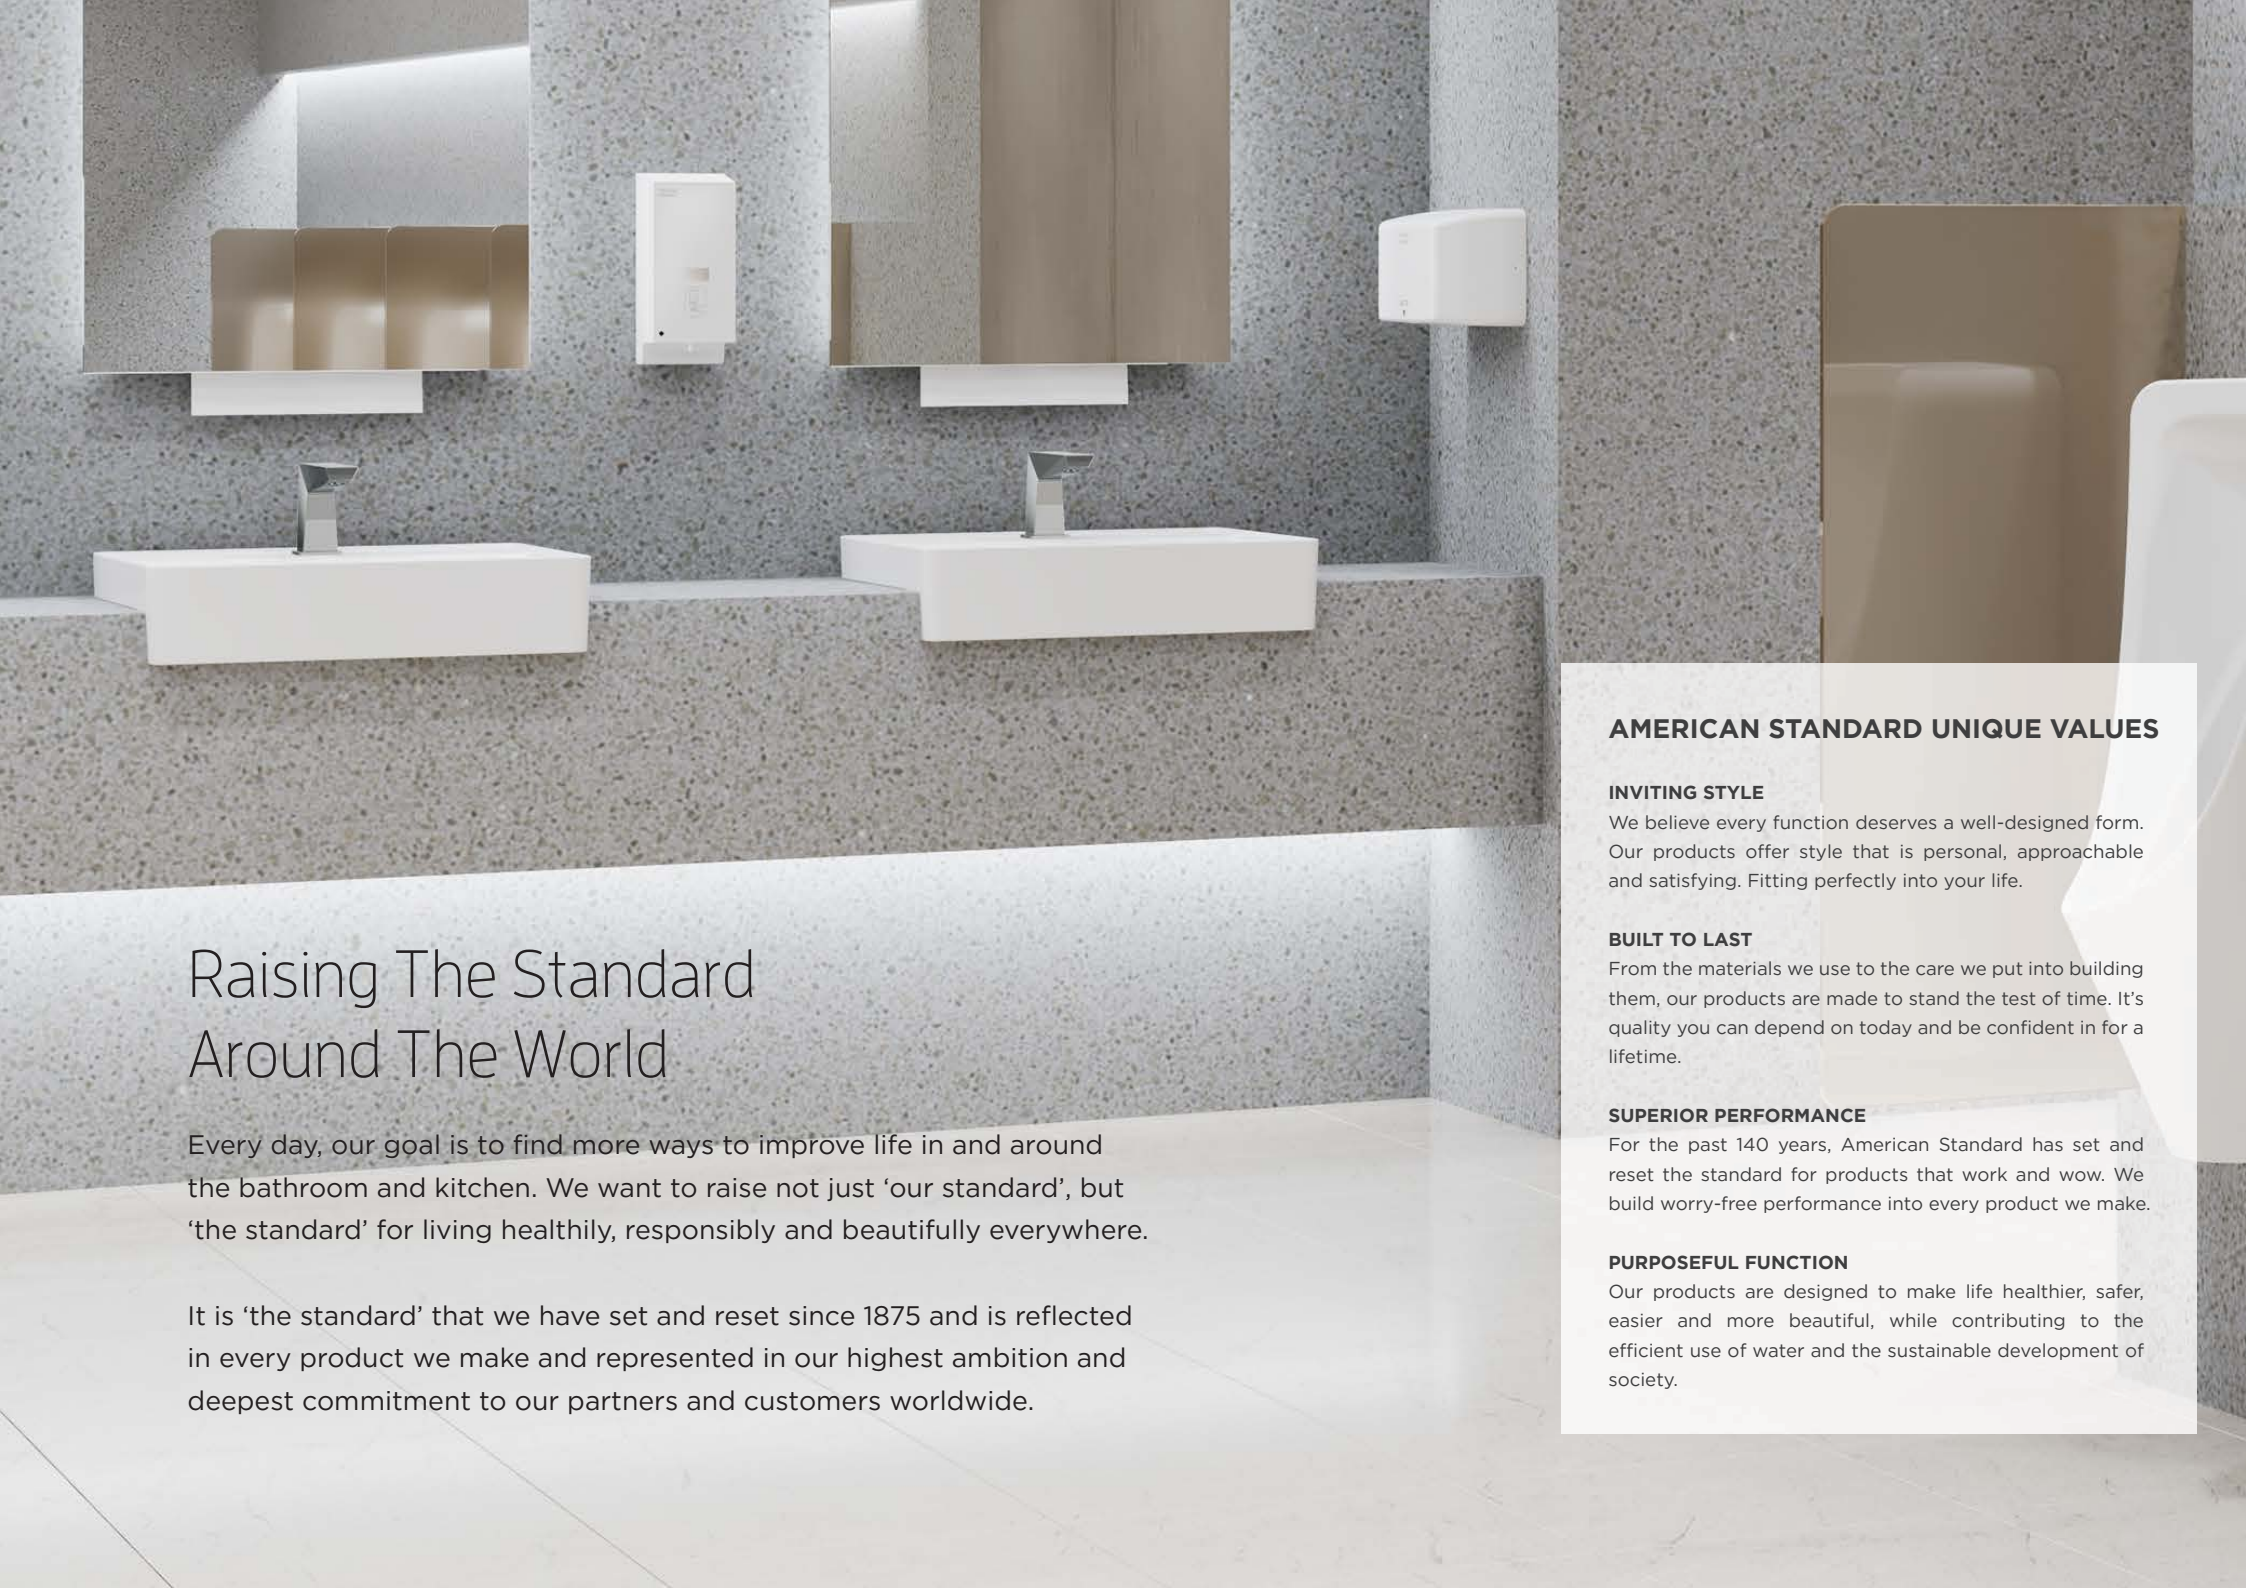

Raising The Standard Around The World

Every day, our goal is to find more ways to improve life in and around the bathroom and kitchen. We want to raise not just 'our standard', but 'the standard' for living healthily, responsibly and beautifully everywhere.

It is 'the standard' that we have set and reset since 1875 and is reflected in every product we make and represented in our highest ambition and deepest commitment to our partners and customers worldwide.

AMERICAN STANDARD UNIQUE VALUES

INVITING STYLE

We believe every function deserves a well-designed form. Our products offer style that is personal, approachable and satisfying. Fitting perfectly into your life.

BUILT TO LAST

From the materials we use to the care we put into building them, our products are made to stand the test of time. It's quality you can depend on today and be confident in for a lifetime.

SUPERIOR PERFORMANCE

For the past 140 years, American Standard has set and reset the standard for products that work and wow. We build worry-free performance into every product we make.

PURPOSEFUL FUNCTION

Our products are designed to make life healthier, safer, easier and more beautiful, while contributing to the efficient use of water and the sustainable development of society.

Highlights Of American Standard Touchless

ADVANCED FAUCET SENSOR TECHNOLOGY

Our Line Sensor faucets feature a detector that has 64 light-receiving elements, and image processing technology to provide unmatched sensor precision compared to conventional infrared sensors. This accuracy helps to minimize water usage by effectively eliminating false detection. It's so precise that we say it's "A line above the rest".

COMMERCIAL LEVEL DURABILITY

Designed to withstand high-volume use, American Standard ceramics provide long-lasting dependability with their advanced glazing. Premium toilet models feature Aqua Ceramic super hydrophilic anti-stain coating that radically reduces cleaning and water use – substantially lowering operating costs.

LASTING QUALITY OF SURFACES

American Standard DuraShine chrome surfaces are incredibly scratch resistant and require minimal cleaning – perfect for public sanitary facilities.

BACTERIA PREVENTION BY DESIGN

Our latest sensor-integrated urinals incorporate water-spreader outlets that eliminate the use of bacteria-festering rims common in conventional urinal designs. The inner curved surface of the bowl, optimally matched to the spread of water, is fully rinsed with every water-efficient flush.

HYGIENECLEAN – A BENCHMARK FOR SAFETY IN TOILETS

American Standard premium WCs feature the revolutionary HygieneClean System that is a benchmark for toilet safety. HygieneClean combines powerful flushing technology (SiphonMax / Double Vortex), state-of-the-art anti-bacterial/anti-stain glaze (Comfortclean / Aqua Ceramic), and advanced rim designs (Power Rim / Hygiene Rim) to deliver the utmost level of toilet sanitation. The anti-bacterial materials on our toilet seats are SIAA-certified.



AMERICAN STANDARD TOUCHLESS SOLUTIONS

TOILET ZONE



FFAS8703-000500BC0 (DC)
FFAS8713-000500BC0 (AC)
SenseFlow II concealed
sensor flush valve



FFAS8603-000500BC0 (DC)
FFAS8613-000500BC0 (AC)
SenseFlow concealed
sensor flush valve



FFAS8833-000500BC0
Selectronic exposed
toilet flush valve



CEAS5017-0110400T0
Aerozen G2 shower toilet



CEAS7SL1-0100510P0
Pristine E-bidet



CA625SWH-A156A
Slim Smart Washer 2
manual bidet



CSCFA650-1CACT0000
Slim Smart Washer 3
manual bidet



CL31197 / CL32297
Acacia Supasleek
wall hung / BTW toilet



CL31198-6DACTPT
CL32298-6DAAUCC
Acacia E
wall hung / BTW toilet



CCAS2140 / CCAS2141
Signature
wall hung / BTW toilet



CCAS2105-0220400A0
Concept Nuovo
wall hung toilet



CCAS2131
Kastello SQ
wall hung toilet



CCAS2207
Compact Codie
wall hung toilet



CCAS3128
Cadet wall hung toilet



CCAS3130
Winston wall hung toilet



CL25305-6DACTTL
Flexio
One piece touchless
toilet



CL28935-6DACTSTTL
Halo
Close coupled touchless
toilet



CL26305-6DACTNFTL
Neo Modern
Close coupled touchless
toilet



CL25315-6DACTCBTL
Neo Modern
One piece touchless toilet

URINAL ZONE



CCAS6519-3110410F0 (DC)
CCAS6519-3120410F0 (AC)
Lynbrook integrated
wall hung urinal (0.5 LPF)



CCAS6506-4110410C0 (DC)
CCAS6506-4130410C0 (AC)
Integrated
wall hung urinal



CCAS6507-3100410C0 (DC)
CCAS6507-3120410C0 (AC)
Concept integrated
wall hung urinal



CCAS6606-311A410C0 (DC)
CCAS6606-312A410C0 (AC)
Lynbrook integrated
floor stand urinal



FFAS8704-0C5500BC0 (DC)
FFAS8714-0C5500BC0 (AC)
FFAS8704-0C1500BC0 (DC)
FFAS8714-0C1500BC0 (AC)
FFAS8704-0C2500BC0 (DC)
FFAS8714-0C2500BC0 (AC)
PSD concealed sensor



FFAS8004-000500BF0 (DC)
FFAS8014-000500BF0 (AC)
Selectronic concealed
sensor urinal flush valve



FFAS8604-000500BF0 (DC)
FFAS8614-000500BF0 (AC)
SenseFlow concealed
sensor urinal flush valve



FFAS8834-000500BC0
Exposed sensor
urinal flush valve



CCAS6509-3200410C0 (T)
CCAS6509-3100410C0 (B)
Lynbrook wall hung urinal



CCAS6605-3200420C0 (T)
CCAS6605-3100420C0 (B)
Lynbrook floor stand urinal



CCAS6747-3100410C1
Neo Modern
wall hung urinal



CCAS6510-3200410C0 (T)
CCAS6510-3100410C0 (B)
Flexbrook
wall hung urinal



CCAS6737-3210410C1 (T)
CCAS6737-3100410C1 (B)
New Contour
wall hung urinal

AMERICAN STANDARD TOUCHLESS SOLUTIONS

BASIN ZONE



FFAS8509-D00500BC0 (DC)
FFAS8509-A00500BC0 (AC)
Line sensor square
faucet



FFAS8510-D00500BC0 (DC)
FFAS8510-A00500BC0 (AC)
Line sensor square
vessel faucet



FFAS8511-D00500BC0 (DC)
FFAS8511-A00500BC0 (AC)
Line sensor square
wall mount faucet



FFAS8506-D00500BC0 (DC)
FFAS8506-A00500BC0 (AC)
Line sensor bubble
faucet



FFAS8507-D00500BC0 (DC)
FFAS8507-A00500BC0 (AC)
Line sensor bubble
vessel faucet



FFAS8508-D00500BC0 (DC)
FFAS8508-A00500BC0 (AC)
Line sensor bubble
wall mount faucet



FFAS8601-000500BC0 (DC)
FFAS8611-000500BC0 (AC)
FFAS8601-0P55E0BF0 (DC)
FFAS8611-0P55E0BF0 (AC)
SenseFlow sensor faucet



FFAS8800-000500BC0 (DC)
FFAS8810-000500BC0 (AC)
Selectronic sensor faucet



FFAS8805-000500BC0 (DC)
FFAS8815-000500BC0 (AC)
FFAS8805-0P55E0BF0 (DC)
FFAS8815-0P55E0BF0 (AC)
Selectronic sensor faucet

*Suitable for sustainability-focused projects



FFAS8101-AD0500BF0
Integral foam & water
faucet



FFAS8102-AD0500BF0
Sensor foam dispenser



FFAS8006-010090BF0
Sensor soap
dispenser



FFAS8017-000230BC0
High speed hand dryer
(silver)



FFAS8017-000090BC0
High speed hand dryer
(white)



CCASF513 / 514
Flexio
under counter basin



CCAS0440 / CL0459
Active
under counter basin



CCAS0426 / CL0458I
Active
under counter basin



CL0451I
Concept
under counter basin



CL470LI
Cadet
under counter basin



CCASF419
Acacia Supasleek
semi-recessed basin



CCAS0320
Signature
semi-recessed basin



CCAS0420
Signature
counter top basin



CCASF421
Acacia Supasleek
wall hung basin



CL0953I
Neo Modern
wall hung basin



CCASF411
Acacia Supasleek
vessel basin



CCASF412
Acacia Supasleek
vessel basin



CCASF420
Acacia Supasleek
vessel basin



CCAS0618
Signature vessel basin



CCAS0628
Signature vessel basin



CCASF611
Flexio vessel basin



CCASF613
Flexio vessel basin

PRODUCT SPECIFICATIONS

Sensor Faucets



Sensor Flush Valves



Integrated Sensor Urinal



PRODUCT SPECIFICATIONS (Sensor Faucets)

	BRAND	COLLECTION / TYPE	PRODUCT	SKU CODE	TYPE					MATERIAL		POWER SOURCE				HYGIENE & SAFETY							
					Deck Mounted	Wall Mounted	Sprout Length	Mono	Mixer	Flow rate LPM @ 4.2 Bar	Brass	Composite Polymer	AC	DC	Battery	Battery Life (years)	Inner Water Way	Bi Directional Sensor	Thermal Disinfection	Automatic Flush	Remote	IP Protection	
SENSOR FAUCETS	AMERICAN STANDARD	Senseflow		FFAS8601-000500BC0	•		98	•		5.6	•			•	AA Alkaline	2				•		IPX4	
				FFAS8611-000500BC0	•		98	•		5.6	•		•							•		IPX4	
				FFAS8601-0P55E0BF0	•		98	•		1.1	•			•	AA Alkaline	2					•		IPX4
				FFAS8611-0P55E0BF0	•		98	•		1.1	•		•								•		IPX4
		Selectronic		FFAS8800-000500BC0	•			•		5.6	•			•	AA Alkaline	2					•		IPX4
				FFAS8810-000500BC0	•			•		5.6	•		•								•		IPX4
		Selectronic		FFAS8805-000500BC0	•		128	•		5.6	•			•	AA Alkaline	2					•		IPX4
				FFAS8815-000500BC0	•		128	•		5.6	•		•								•		IPX4
				FFAS8805-0P55E0BF0	•		128	•		1.1	•			•	AA Alkaline	2					•		IPX4
				FFAS8815-0P55E0BF0	•		128	•		1.1	•		•								•		IPX4
		Line Sensor		FFAS8506-A00500BC0	•		129	•		5.9	•		•				•				•		IPX4
				FFAS8506-D00500BC0	•		129	•		5.9	•			•	AA Alkaline	2	•				•		IPX4
				FFAS8507-A00500BC0	•		164	•		5.9	•		•				•				•		IPX4
				FFAS8507-D00500BC0	•		164	•		5.9	•			•	AA Alkaline	2	•				•		IPX4
				FFAS8508-A00500BC0		•	201	•		5.9	•		•				•				•		IPX4
				FFAS8508-D00500BC0		•	201	•		5.9	•			•	AA Alkaline	2	•				•		IPX4
				FFAS8509-A00500BC0	•		128	•		5.9	•		•				•				•		IPX4
				FFAS8509-D00500BC0	•		128	•		5.9	•			•	AA Alkaline	2	•				•		IPX4
				FFAS8510-A00500BC0	•		163	•		5.9	•		•				•				•		IPX4
				FFAS8510-D00500BC0	•		163	•		5.9	•			•	AA Alkaline	2	•				•		IPX4
				FFAS8511-A00500BC0		•	201	•		5.9	•		•				•				•		IPX4
				FFAS8511-D00500BC0		•	201	•		5.9	•			•	AA Alkaline	2	•				•		IPX4

*Suitable for sustainability-focused projects

PRODUCT SPECIFICATIONS (Sensor Flush Valves)

								TYPE		OPERATING PRESSURE IN BAR		ELECTRONIC				POWER SOURCE				IP PROTECTION				
								Exposed	Concealed	Min	Max	Factory Setting Distance (cm)	Automatic Flush	Cleaning Mode	Pre-Flush On / Off	Remote Control	AC	DC	Battery	Battery Life (years)	Fittings	Transformer	Bluetooth Connectivity	
URINAL FLUSH VALVES	AMERICAN STANDARD	IR - Senseflow		FFAS8604-000500BC0-DC	Urinal FV	130 x 150	3 (less than 3LPF @ 1.7 bar)		●	0.5	7.5	40 (40–80)	●		●		●	AA Alkaline	2	IPX4	IPX7			
				FFAS8614-000500BC0-AC	Urinal FV	130 x 150	3 (less than 3LPF @ 1.7 bar)		●	0.5	7.5	40 (40–80)	●		●		●					IPX4	IPX7	
		IR - Selectronic		FFAS8004-0005E0BC0-DC	Urinal FV	130 x 135	0.5		●	0.5	7.5	40 (40–80)	●					●	AA Alkaline	2	IPX4	IPX7		
				FFAS8014-0005E0BP0-AC	Urinal FV	130 x 135	0.5		●	0.5	7.5	40 (40–80)	●				●					IPX4	IPX7	
		PSD		FFAS8004-0005E0BC0-DC	Urinal FV	130 x 135	0.5		●	0.5	7.5	60 (fixed)	●					●	AA Alkaline	2	IPX4	IPX7		
				FFAS8014-0005E0BP0-AC	Urinal FV	130 x 135	0.5		●	0.5	7.5	60 (fixed)	●				●					IPX4	IPX7	
				FFAS8004-0005E0BC0-DC	Urinal FV	130 x 135	0.9		●	0.5	7.5	60 (fixed)	●					●	AA Alkaline	2	IPX4	IPX7		
				FFAS8014-0005E0BP0-AC	Urinal FV	130 x 135	0.9		●	0.5	7.5	60 (fixed)	●				●					IPX4	IPX7	
				FFAS8004-0005E0BC0-DC	Urinal FV	130 x 135	1.9		●	0.5	7.5	60 (fixed)	●					●	AA Alkaline	2	IPX4	IPX7		
				FFAS8014-0005E0BP0-AC	Urinal FV	130 x 135	1.9		●	0.5	7.5	60 (fixed)	●				●					IPX4	IPX7	
IR - Exposed sensor		FFAS8034-000500BC0	Urinal FV	132 x 60	2-4		●		0.5	7.5	60 (40-60)	●					●	CR123 Lithium	2	IPX4	IPX7			
TOILET FLUSH VALVES	AMERICAN STANDARD	Senseflow		FFAS8603-000500BC0-DC	Toilet FV	160 x 160	8 (less than 8LPF @ 2.4 bar)		●	0.5	7.5	50 (40–80)	●					●	AA Alkaline	2	IPX4	IPX7		
				FFAS8613-005500BC0-AC	Toilet FV	160 x 160	8 (less than 8LPF @ 2.4 bar)		●	0.5	7.5	50 (40–80)	●				●					IPX4	IPX7	
				FFAS8703-000500BC0-DC	Toilet FV	160 x 180	8 (less than 8LPF @ 2.4 bar)		●	0.5	7.5	50 (40–80)	●					●	AA Alkaline	2	IPX4	IPX7		
				FFAS8713-000500BC0-AC	Toilet FV	160 x 180	8 (less than 8LPF @ 2.4 bar)		●	0.5	7.5	50 (40–80)	●				●					IPX4	IPX7	
					FFAS8833-000500BC0-DC	Toilet FV	NA	8 (less than 8LPF @ 2.4 bar)		●		0.5	7.5	50 (40–80)	●					●	CR123 Lithium	2.8	IPX4	IPX7

PRODUCT SPECIFICATIONS (Integrated Sensor Urinals)

							TYPE		FLUSH		OPERATING PRESSURE IN BAR		HYGIENE			POWER SOURCE				
							Wall Hung	Full Installed (FSD)	Spreader	Rim	Min	Max	Ceramic Coating	Stadium Mode	Auto Flush	AC	DC	Battery	Battery Life (years)	IPX Rating
	BRAND	COLLECTION / TYPE	PRODUCT	SKU CODE	DIMENSION (H x W in mm)	FLUSHING LPF														
INTEGRATED SENSOR URINALS	AMERICAN STANDARD	Lynbrook		CCAS6519-3110410F0	780 x 425 x 372	0.5	•		•		0.5	7.5	CC	•	•		•	AAA Alkaline	2.5	IPX7
				CCAS6519-3120410F0	780 x 425 x 372	0.5	•		•		0.5	7.5	CC	•	•	•				IPX7
		Concept		CCAS6507-3100410C0	850 x 465 x 365	1	•			•	0.5	7.5	CC	•	•		•	AAA Alkaline	2.5	IPX7
				CCAS6507-3120410C0	850 x 465 x 365	1	•			•	0.5	7.5	CC	•	•	•				IPX7
		Integrated		CCAS6506-4130410C0	850 x 465 x 365		•			•	0.5	7.5	CC	•	•		•	AAA Alkaline	2.5	IPX7
				CCAS6506-4110410C0	850 x 465 x 365		•			•	0.5	7.5	CC	•	•	•				IPX7
		Lynbrook		CCAS6606-311A410C0	1135 x 370 x 420	1.9		•	•		0.5	7.5	CC	•	•		•	AAA Alkaline	2.5	IPX7
				CCAS6606-312A410C0	1135 x 370 x 420	1.9		•	•		0.5	7.5	CC	•	•	•				IPX7

American Standard

Raising The Standard

PART OF **LIXIL**

LIXIL International Pte Ltd

180 Clemenceau Avenue, Haw Par Centre #06-02, Singapore 239922

Copyright © 2021 LIXIL Group Corporation. All rights reserved.